
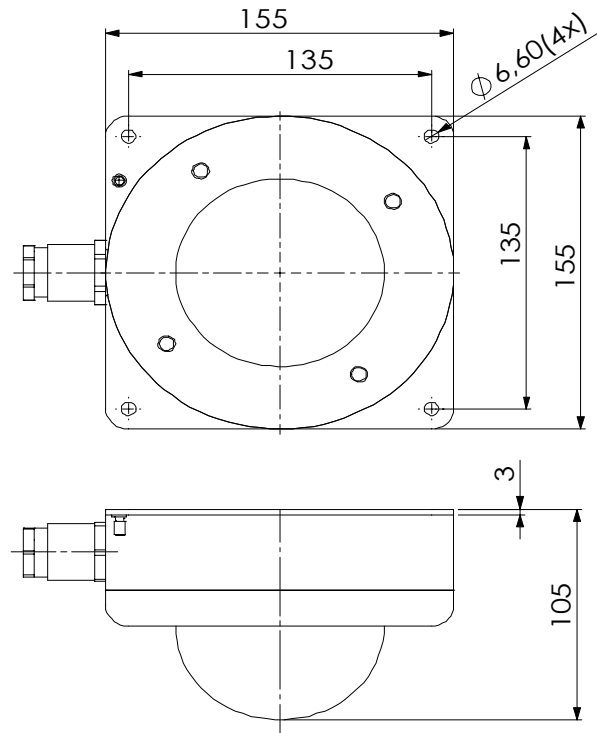


camera housing

data sheet

Type	CH-dome D15 (Indoor/Outdoor Dome colour camera)
Housing	Vandal resistant aluminium housing with polycarbonate dome
IP protection class	IP67
Heater	Automatic controled heating device
Image Sensor	1/3" High Sensivity CCD
Signal System	PAL (NTSC upon request)
Picture Elements	approx. 440k pixels
Horizontal Resolution	480 TV lines
Lens	fixed, 3,8mm @ F2.0
Angle of View(D / H / V)	67° / 53,4° / 40°
Min. Illumination	1,2 Lux
EMC	construction acc. EN 55022, EN 55024
Vibration	1.4G vibration strain in function acc. IEC 60068-2-6
Operating Temperature	-20°C to +55°C
Power Requirements / Power Consumption	12V DC or 24V AC / 2,8W
Weight	1,1 kg (2,2kg with Anti-vibration Kit)
Optional	Anti-vibration mounting bracket

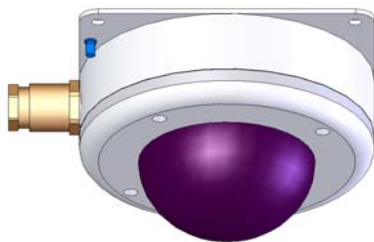

The correctness of data has been made to the best of our knowledge and no responsibility is accepted. Technical improvement reserved Date: 27.01.2005-index: 01